

GAZELLE®

G9651

Battery Powered Hydraulic
Cutting Tool (105mm dia.)
User Manual



Contents

| | |
|--|---|
| 1. Product description..... | 1 |
| 1.1 Instruction of product | 1 |
| 1.2 Description of each part | 1 |
| 1.3 Function description | 2 |
| 2. Technical data | 3 |
| 3. Safety precautions | 3 |
| 3.1 Operating safety | 3 |
| 3.2 Electricity safety | 4 |
| 4. Operating instruction..... | 4 |
| 4.1 Instruction for battery charging | 4 |
| 4.2 Usage of the tool..... | 5 |
| 4.3 Description of LED display interface | 6 |
| 5. Maintenance and Servicing | 6 |
| 6. Packing list..... | 7 |

1.Product description

1.1 Instruction of product

Thank you for purchasing and using battery hydraulic tools. The battery hydraulic tools are powered by high-performance lithium batteries, driven by a motor, a two-stage hydraulic system, automatic pressure relief, built-in smart computer chips, OLED display for easy reading of information, and LED work lights to make work more convenient. The toolbox is made of environmentally friendly engineering PP plastic, integrally formed, resistant to pressure and drop. It is a professional tool for cutting copper and aluminum cables in electrical construction.

1.2 Description of each part



| No. | Name | Function |
|-----|-------------------------|---|
| 1 | Fixed blade | For cutting cable |
| 2 | Moving blade | For cutting cable |
| 3 | Lighting lamp (LED) | Indicates operating conditions and battery discharge conditions |
| 4 | Trigger | Working switch |
| 5 | Pressure release button | Manually reset the piston |
| 6 | Battery lock | Lock/release the battery |
| 7 | Battery | Rechargeable Li-ion battery |
| 8 | OLED screen | Display battery volume and cutting times |

1.3 Function description



The hydraulic unit incorporates an automatic retraction which returns the piston into its starting position when the maximum operating pressure is reached.



A manual retraction allows the user to return the piston into the starting position in case having selected the wrong cable.



Miniature two-stage hydraulic system-the piston will advance quickly during the low pressure crimping process, and the piston will advance slowly after the dies contacts the terminal.



The head can be smoothly turned by 360° around the longitudinal axis in order to gain better access to tight corners and other difficult working areas.



One significant sound will be heard and a red display flashes if any error occurs.



The whole tool is controlled by one trigger. This results in an easy handling and a better grip compared to a two buttons operation.



Lithium batteries are recommended to be fully charged every 2 months. In addition, compared with nickel-hydrocarbon batteries, the storage capacity is 50% higher, the charging is fast and the time is short.

⚠ A temperature sensor makes the tool stop working automatically when the temperature over 60°C under long time working, the fault signal sounds, it means the tool can't continue work until the temperature reduce to the normal.



| Hardware Action description | LED light shows red | LED light shows white | Buzzer |
|--|--|---------------------------------|-------------------------------|
| Battery | First indicating for 1s then flash twice and off | x | x |
| Push the trigger (motor working) | x | Lighting | x |
| Release the trigger (motor stops working) | x | Continue light for 20s then off | x |
| Re-push the trigger within 20s after releasing the trigger | x | Light | x |
| Low power of battery (motor no working) | Flash for 3 times | x | Sounds 3 times simultaneously |

| | | | |
|---|--------------|---|-----------------------|
| Low power of battery (motor working) | Light for 3s | × | Sounds for 3 times |
|---|--------------|---|-----------------------|

2. Technical data

| | |
|--------------------------------------|---|
| Output force | 120KN |
| Cutting capacity | Max. $\phi 105\text{mmCu/Al}$, Max. $3 \times 300\text{mm}^2$ armored cable |
| Ambient temperature | -10-40°C |
| Battery | DC 18V 4.0Ah lithium battery |
| Cutting cycle | 8-20s/time(according to the diameter of the cable) |
| Cutting times after fully charged | 40-60 times(according to the diameter of the cable) |
| Charging time | 40 minutes |

3. Safety precautions

3.1 Operating safety

3.1.1 Keep the work area clean and bright, chaos or insufficient light may cause accidents.

3.1.2 The tool is not insulated and should not be used for live conductors.

3.1.3 Do not use or store tools around high temperature or corrosive liquids. Pay attention to the deterioration of the sealing components.

3.1.4 When operating hydraulic tools, do not point your tools' head towards other people. Children and bystanders should not be close. Distraction during work may cause the tool to lose control.

3.1.5 Maintain a high degree of vigilance when operating tools, fully grasp the situation, and perform operations with normal judgment. Do not use tools when you are tired or after taking medication or drinking alcohol. A momentary negligence may cause a series of personal injuries.

3.1.6 Use safety equipment. Always be equipped with masks, goggles, safety helmets, insulated shoes, etc. to reduce the risk of personal injury.

3.1.7 Dress appropriately. Do not wear loose clothing or jewelry. Keep hair, clothing corners and gloves away from rotating parts. Loose corners of clothing, jewelry, or long hair may be twisted into rotating parts.

3.1.8 Maintenance of hydraulic tools. Check the calibration and connection of the rotating parts, whether there are any abnormalities in each part, and other conditions that are sufficient to bring adverse effects to the work. If it is damaged, it must be repaired before it can be used.



Please use the tool correctly, and do not put your fingers on the tool head during operation to prevent severely pinching your fingers.

3.2 Electricity safety

3.2.1 The power plug of the charger must match the socket, and the plug must not be modified in any way.

3.2.2 Do not expose the charger, battery and tools to work in rain or humid environment. Water entering the electrical system will increase the risk of electric shock.

3.2.3 Do not abuse the wire, never use the wire to carry, pull the charger or unplug its plug. Damaged or entangled wires increase the risk of electric shock.

3.2.4 If the charger is severely impacted or dropped on the ground or damaged in any other way, please do not use it or disassemble it, and hand it to qualified maintenance personnel. Using a damaged charger may cause electric shock or fire.

3.2.5 Do not charge the battery when the temperature is higher than 40°C, and do not cover or block the cooling holes of the charger and battery during charging.

3.2.6 In the event of thunderstorms and lightning, please unplug the charger.

3.2.7 Do not short-circuit or burn the battery to avoid explosion.

Note: When not in use, store tools out of the reach of children and other people who are not familiar with tools.

4. Operating instruction

4.1 Instruction for battery charging


Push battery into charger and connect the plug with the plug seat. Make sure the room temperature is between 10°C-40°C. The charging time is around an hour. Please see the illustration below.



1.



2.



3.



4.

Charger Indicator light:

1. Green light flashes - power on
2. The red light is always on - charging status (below 80%)
3. The red light and the green light are always on - charging status (above 80%)
4. The green light is always on - 100% full
5. Flashing red light or flashing red and green lights at the same time - charger or battery failure

Note:

●The battery can be charged and discharged hundreds of times, but it will eventually fail. When the number of times the tool is used is significantly reduced, replace the battery. Please charge the battery in time, and do not drain the battery completely, as this will cause permanent failure of the lithium battery.

●When the tool is left unused for a long time, self-discharge will also occur inside the battery. You should remove the battery and keep the battery fully charged every quarter.

●Do not use wires to connect the two poles of the battery, as this may easily cause electric sparks, combustion or even explosion.

●Do not use or charge a damaged battery, otherwise it will increase the risk of electric shock.

●The battery is not allowed to be burnt under any circumstances, otherwise it will cause an explosion.

●When the battery is being charged, do not cover the charger with any objects. If the charger cannot dissipate heat, it may easily cause a fire.

●Please disconnect the power supply when you are not using the charger. This will reduce the risk of injury to children and untrained personnel.

●Do not use the charger in a humid environment, and do not expose it to rain or snow, otherwise it will increase the risk of electric shock.

●Do not disassemble the battery and charger without authorization. If any failure occurs during use, please hand it over to a professional or manufacturer for repair, and continue using it until the problem is solved.

4.2 Usage of the tool

- 1) First you have to check the LED indicator is light or not. If the indicator is light on for more than 5 seconds, it means no power of the battery and should change the full powered battery to settle on the tool.
- 2) Pull out the pin, open the head, then put the cable/conductor inside and lock the blade by the pin.
- 3) The cable should be placed vertically to prevent pinching or damaging the blade, pull the trigger to start cutting.
- 4) A cutting cycle is completed when the blades closed completely or when reached the maximum cutting force.

▲CAUTION The cutting process can be interrupted at any time by


releasing the trigger.



1. Do not knock any parts of the tool, otherwise it will cause injury.
2. Make sure the head was locked firmly during operation.
3. The built-in safety valve goes through strict pressure test before delivery. Please do not adjust the pressure by unprofessional person. If the pressure is not enough, please return the tool back to the service center. The tool only can be re-used after checking and testing by trained person.

⚠ DANGER Do not put your fingers into the head of the tool during operating. Your fingers could be pinched very severely.

4.3 Description of LED display interface

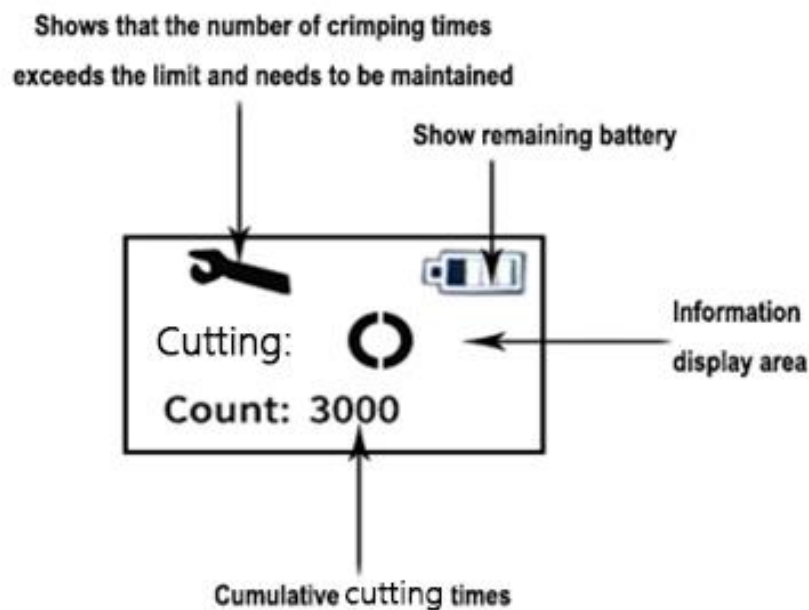

5. Maintenance and Servicing

- 5.1 The tool earns a high precise design, please use it properly and do not disassemble it by unprofessional person, otherwise we will not responsible for the problems cause by above misuse. Or we will carry out repair if the users are willing to pay for the spare parts cost.
- 5.2 Keep the tools dry. Any water may corrode surfaces, metal or electrical parts. If exposed to water, take out the battery and assemble it after it is completely dry.
- 5.3 Avoid severe temperature fluctuations. Otherwise it will cause

deformation of the plastic shell, shorten the life span, and damage the battery. Please do not use any chemical reagents to clean tools.

- 5.4 In order to extend the service life, please change the hydraulic oil every year.
- 5.5 If the tool is not used for a long time, please make sure the piston is in the starting position, clean the tool and apply anti-rust oil. Store in a box in a dry environment.
- 5.6 The sealing components in the tool will be worn after use. If there is a lot of oil leakage, please contact the after-sales service to replace the sealing components in time.
- 5.7 The original manufacturer's standard warranty period is 12 months from the date of delivery except for human reasons.

6. Packing list

| | |
|---|----------|
| Tool | 1 piece |
| Battery | 2 pieces |
| Charger | 1 piece |
| User manual, warranty card Quality certificate | 1 piece |
| Tool box | 1 piece |



We shall in no event be liable for death, injuries to persons or property from the improper use and lack of maintenance of our product. Any doubt of safety operation and precaution, please contact with our distributor.



Please properly dispose of all packing materials and removed parts.

INNOVATION
PERFORMANCE
SAFETY
CONFIDENCE
GAZELLE

GAZELLE

sales@gazelleindustrial.com | www.gazelleindustrial.com