




Hydraulic Bearing Puller Series

G9670 Series - G9671 | G9672



- Three jaws bearing puller
- High strength alloy steel forged
- Four sections foldable and removable handle, easy to operate
- 360° swivel seat
- Puller body is equipped with a safety valve
- Hydraulic cylinder hard chrome treatment to strengthen hardness
- Claw load is more than 120% of the rated load

Standard Accessories

- Hydraulic bearing puller


Note:

With built-in hydraulic pump

Specifications	G9671	G9672
Force	12t	30t
Stroke (A)	85mm	111mm
Pressure Area	14.45 cm ²	42 cm ²
Claw Depth	260mm	435mm
Claw Distance	375mm	550mm
Weight	9.5kg	36kg
Top	B = 60mm C = 28mm D = 118mm	B = 98mm C = 50mm D = 115mm
Claw End	A1 = 14mm B1 = 10mm C1 = 29mm	A1 = 20mm B1 = 27mm C1 = 38mm

Hydraulic Bearing Puller Series

G9670 Series - G9673 | G9674

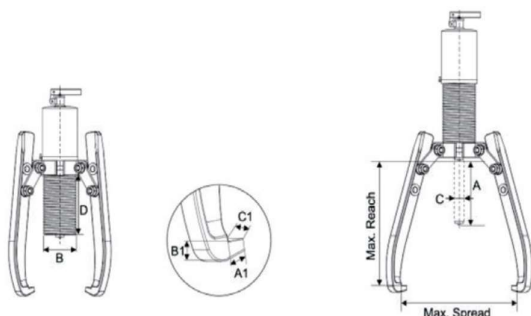

- Three jaws bearing puller
- High strength alloy steel forged
- Four sections foldable and removable handle, easy to operate
- 360° swivel seat
- Puller body is equipped with a safety valve
- Hydraulic cylinder hard chrome treatment to strengthen hardness
- Claw load is more than 120% of the rated load

Standard Accessories

- Hydraulic bearing puller

Note:

Compatible with G9645 foot pump, G9745-II hand pump, G9635 battery operated pump

Specifications	G9673	G9674
Force	12t	30t
Stroke (A)	85mm	111mm
Pressure Area	14.45 cm ²	42 cm ²
Claw Depth	260mm	435mm
Claw Distance	375mm	550mm
Weight	9.5kg	34kg
Top	B = 60mm C = 28mm D = 118mm	B = 98mm C = 50mm D = 115mm
Claw End	A1 = 14mm B1 = 10mm C1 = 29mm	A1 = 20mm B1 = 27mm C1 = 38mm